





THE LEADER IN OVEN DESIGN...


PRESENTS A COMPLETE NEW LINE OF BATCH OVENS

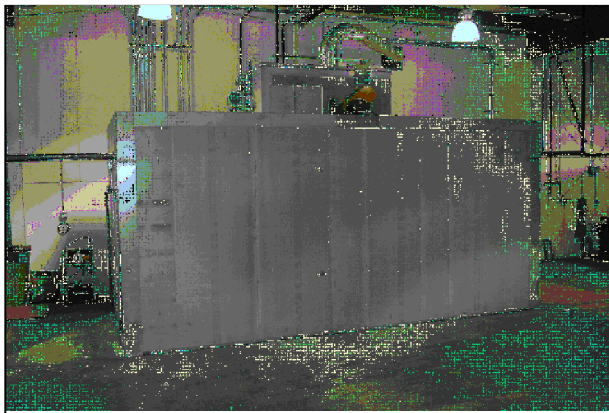

NEW DESIGN

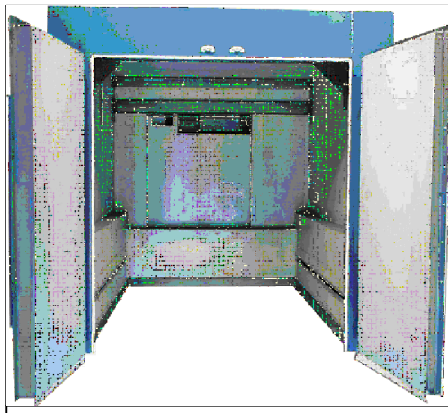

UNIFORM AIR FLOW

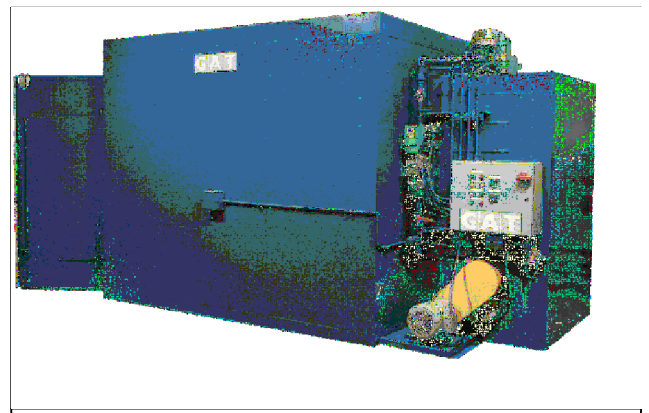


MULTIPLE CONFIGURATIONS

STANDARD FEATURES ...

- 6" THICK HEAVY DUTY PANELS CONSTRUCTED OF 18 GAUGE GALVANNEALED STEEL AND 4 LB. DENSITY MINERAL WOOL INSULATION
- DUAL DUCTWORK DESIGN
- ECLIPSE AIR HEAT BURNERS
- PROPORTIONAL MODULATING GAS CONTROL
- MANUAL MODE & CYCLE TIME MODE STANDARD

- EXCLUSIVE INTEGRAL RECIRC/EXHAUST DRIVE SYSTEM
- DUAL USE - WET PAINT OR POWDER COATING
- HEATERS FACTORY PRE-FIRED & TESTED
- U.L. LISTED CONTROL PANEL
- UNITS BUILT TO N.F.P.A., C.G.A. AND U.L. STANDARDS
- ALL UNITS SHIPPED UNPAINTED, KNOCKED DOWN
- PLC CONTROL AVAILABLE UPON REQUEST

MODEL DESIGNATION



A - BASE MODEL

- 0606 - 6'-0"W x 6'-8"H OPNG
- 0808 - 8'-0"W x 8'-0"H OPNG
- 1010 - 10'-0"W x 10'-0"H OPNG

B - WORK DEPTH

- 10 - 10'-0" WORK DEPTH
- 14 - 14'-0" WORK DEPTH
- 18 - 18'-0" WORK DEPTH
- 22 - 22'-0" WORK DEPTH
- 26 - 26'-0" WORK DEPTH
- 30 - 30'-0" WORK DEPTH

C - CONFIGURATION

- EHS - END MOUNT HEATER- SINGLE DOOR
- SSL - SIDE MOUNT HEATER- SINGLE DOOR HEATER ON LEFT (FACING DOOR)
- SSR - SIDE MOUNT HEATER- SINGLE DOOR HEATER ON RIGHT (FACING DOOR)
- SHD - SIDE MOUNT HEATER- DOUBLE DOOR
- THS - TOP MOUNT HEATER- SINGLE DOOR
- THD - TOP MOUNT HEATER- DOUBLE DOOR

D - HEATER CAPACITY

- 08 - 5,600CFM RECIRC BLOWER W/.8 MBTU/HR BURNER
- 12 - 9,932CFM RECIRC BLOWER W/1.2 MBTU/HR BURNER
- 16 - 9,932CFM RECIRC BLOWER W/1.6 MBTU/HR BURNER

E - FUEL- 1 TO 7 PSI REQD AT HEATER LOCATION

- NG - NATURAL GAS
- LP - PROPANE / LP GAS

F - VOLTAGE

- 20 - 200/208 VOLT
- 24 - 230/240 VOLT
- 48 - 460/480 VOLT

G - PHASE

- 1 - SINGLE PHASE
- 3 - THREE PHASE

H - FLOOR

- NO - NO FLOOR
- PF - 12 GA PLATE FLOOR
- FF - 2" INSULATED FULL FLOOR
- FT - 2" INSULATED FLOOR WITH 8" WIDE CART TRACKS- NOTE TRACK CENTERS REQD

I - OVERHEAD CONVEYOR SLOTS

- NS - NO SLOT
- 1S - 1 SLOT
- 2S - 2 SLOTS
- 3S - 3 SLOTS
- 7" WIDE SLOT ACCOMMODATES ENCLOSED TRACK RAILS AS WELL AS 3" AND 4" I-BEAM
- TOP OF RAIL IN 6'-8"H OPNG- 7'-2" OFF BLDG FLOOR
- TOP OF RAIL IN 8'-0"H OPNG- 8'-6" OFF BLDG FLOOR
- TOP OF RAIL IN 10'-0"H OPNG- 10'-6" OFF BLDG FLOOR
- NOTE- CONVEYOR RAIL CENTERS REQD

J - CONTROL PANEL OPTIONS

- STD - STANDARD
- PLC - PLC LOGIC

K - CONTROL PANEL LOCATIONS

- 1 - STANDARD
- 2 - OPTIONAL REMOTE PEDESTAL MOUNT
- END MOUNT HEATER- PANEL LOCATED ON HEATER- STANDARD
- SIDE MOUNT HEATER- PANEL LOCATED ON HEATER- STANDARD
- TOP MOUNT HEATER- REMOTE PEDESTAL MOUNT- STANDARD

NOTE: NOT ALL PARAMETER COMBINATIONS ARE AVAILABLE. SEE MODEL AVAILABILITY CHART

GENERAL AUTOMATIC TRANSFER CO.
 100 LARKIN WILLIAMS INDUSTRIAL COURT
 FENTON, MO. 63026 FAX: 636-343-6972
 PHONE: 636-343-6370
 www.gat-systems.com